

# IPX10:8 DSP power amplifier 8x1250W, install



- 8 x 1250 W multichannel installation DSP amplifier with digitally controlled PFC supply
- Fully integrated DSP with native 96 kHz and FIR Drive technology
- Dante and OCA integration via OMNEO with fail back options
- Parallel, Bridge and Parallel-bridge modes with 70/100 V and low impedance operation
- High efficiency Eco-rail technology for lower operating costs

## Parts included

Quantity	Component
1	IPX series DSP power amplifier
2	8-pin Euroblock-type connector, Output, 6mm
4	6-pin Euroblock-type connector, Input
1	8-pin Euroblock-type connector, GPIO
4	M6x20 screw for rack mounting
1	Installation manual
1	Mains power connector, 32A with safety & assembly instruction
1	Safety instruction booklet

## Technical specifications

Amplifier model	IPX10:8
<b>OUTPUT POWER</b>	

<b>Low-Z mode: Load Impedance</b>	2 Ω	2.7 Ω	4 Ω	8 Ω
<b>Maximum Output Power<sup>1</sup></b>				
Normal Mode, all channels driven	1300 W	1500 W	1250 W	1250 W
Bridged	-	-	2600 W	2500 W
Parallel	2500 W	3000 W	2500 W	1250 W
Parallel-Bridged	5200 W	6000 W	5000 W	5000 W
<b>Direct Drive Mode: Nominal Voltage</b>	70 V	100 V	140 V <sup>2</sup>	200 V <sup>2</sup>
<b>Maximum Output Power<sup>1</sup></b>	1250 W	1250 W	2500 W	2500 W
<b>Number of amplifier channels</b>	8			
<b>Maximum Output Voltage, Normal mode, per channel</b>	150 V <sub>peak</sub>			


<b>Maximum Output Current</b> , Normal mode, per channel	41 A <sub>peak</sub>
<b>AMPLIFIER</b>	
<b>Voltage Gain</b>	
Low-Z mode, ref.1 kHz	32.0 dB, adjustable 20.0 - 44.0 dB
Direct Drive mode	33.2 / 36.2 / 39.2 / 42.2 dB for 70 / 100 / 140 / 200 V
<b>Input Sensitivity</b>	
Low-Z mode, Max. Output Voltage	10.7 dBu (2.66 V), adjustable -1.3 - 22.7 dBu
Direct Drive mode	6 dBu (1.55 V), fixed
<b>THD</b> 2 dB below max, AES17, 1 kHz	< 0.05 %
<b>DIM 100</b> 3.15 kHz, 15 kHz	< 0.15 %
<b>IMD-SMPTE</b> , 60 Hz, 7 kHz	< 0.05 %
<b>Crosstalk</b> ref. 1 kHz, 12 dB below Max, 8 Ω	< -80 dB
<b>Frequency Response</b> , ref. 1 kHz, analog in to speaker out	20 Hz to 20 kHz (±0.5 dB)
<b>Damping Factor</b> , 20 Hz to 200 Hz, 8 Ω	> 400
<b>Output Stage Topology</b>	Class D, fixed frequency
<b>Signal to Noise Ratio Amplifier</b>	
A-weighted, analog input	112 dB
A-weighted, digital input	115 dB
<b>Output Noise</b>	
A-weighted, analog input	< -70 dBu
A-weighted, digital input	< -73 dBu
<b>CONNECTIVITY</b>	
<b>Analog Audio Input/Thru</b>	

Type	4 x 6-pin Euroblock, male
Maximum Input Level	+21 dBu
Input Impedance, active balanced	20 kΩ
Reference level equal to digital input	+21 dBu for 0 dBFS
<b>Speaker Output</b>	2 x 8-pin Euroblock, 6mm, female
<b>GENERAL</b>	
<b>Power Consumption</b>	
Rated power consumption (see BTU table)	1300 W
1/8 Maximum Output Power at 4 Ω	1780 W
Idle Mode (no input signal)	105 W
Standby Mode	< 18 W
<b>Dimensions</b> (W x H x D), mm	484 x 88.1 x 514
<b>Weight</b>	16.8 kg (37.1 lb)
<b>Shipping Weight</b>	19.1 kg (42.1 lb)
Amplifier at rated conditions, Low-Z Normal operation mode, all channels driven, 4 Ω loads, Analog input, 32 dB Gain, 48 kHz sample rate, unless otherwise specified	
<sup>1</sup> Test signal for max. output power according IHF-A-202 (Dynamic-Headroom, burst 1 kHz / 20 ms on / 480 ms off / low level -20 dB).	
<sup>2</sup> Available in Bridged operation mode only.	
<b>Amplifier models</b>	IPX5:4, IPX10:4, IPX10:8, and IPX20:4
<b>DIGITAL SIGNAL PROCESSING</b>	
<b>Sampling rate</b>	48 kHz / 96 kHz, OMNEO/Dante synchronized
<b>Signal delay/latency</b> Analog In to Speaker Out, 48 kHz/96 kHz	0.70 ms / 0.53 ms
<b>Dante Network Latency</b>	typ. 1.00 ms
<b>Signal Processing</b>	
User EQ	12 filters per channel, selectable as PEQ, Lo-Shelv, Hi-Shelv, Lo-ShelvQ, Hi-ShelvQ, Hi-Pass, Lo-Pass and Notch; 2 filters of them with additional asymmetric filter type

User Delay	0 to 2000 ms per channel (units: $\mu$ s, ms, s, cm, m, inches, feet)
Array EQ	5 filters per channel, selectable as PEQ, Lo-Shelv, Hi-Shelv, Hi-Pass, Lo-Pass and All-Pass
Array Delay	0 to 500 ms per channel (units: $\mu$ s, ms, s, cm, m, inches, feet)
Speaker EQ	10 filters per channel, selectable as PEQ, Lo-Shelv, Hi-Shelv, Lo-ShelvQ, Hi-ShelvQ Hi-Pass, Lo-Pass and All-Pass
Speaker X-Over	Hi-Pass, and Lo-Pass per dB channel, 6/12/18/24/30/36/42/48 dB Bessel/Butterworth, 12/24/48 Linkwitz-Riley; Alignment Delay, 0 to 20 ms per channel
Speaker FIR	Up to 1025 taps, Linear Phase Filter, Linear Phase Brickwall X-Over
Speaker Limiters	Peak Anticipation Limiter and RMS/TEMP Limiter per channel
Other Functions	Source Selection and Mix, Level, Mute, Polarity, Sine and Noise Generator, Pilot Tone Generator and Detection, Level Meters, Impedance Measurement and Load Monitoring
<b>Memory</b>	
DSP Presets	5 Factory + 20 User
Speaker-Pool Presets	30 Speaker Settings
<b>Source Supervision and Fallback</b>	Pilot Tone supervision at Analog and OMNEO/Dante inputs, switchover to alternative Source Selection
<b>CONNECTIVITY</b>	
<b>Network</b>	
Type	2 x Neutrik EtherCON/RJ45, redundant PRIMARY/SECONDARY
General	1000base-T/100base-TX, integrated switch
Network Audio Inputs	8 channels, 48/96 kHz, OMNEO/Dante format
Network Audio Outputs (Monitor)	2 channels, 48/96 kHz, OMNEO/Dante format
<b>Mains Input</b>	1 x Neutrik powerCON-HC
<b>GPIO Control Port</b>	
Type	1 x 8-pin Euroblock, male
Ports and Operating Modes	3 x GPIO, switchable Analog In/Digital In/Digital Out

Analog Input Range	0 V to +13 V, 40 k $\Omega$ input resistance
Digital Input Limits	ON: < 1.5 V / OFF: > 2.0 V, internal Pull Up (10 k $\Omega$ )
Digital Outputs	ON: Output switched to GND, max. 200 mA OFF: Open Collector (40 k $\Omega$ to GND)
Reference Voltage Output	+10 V, max. 200 mA, supervised, short circuit protected
READY/FAULT contact	Galvanic isolated relay, max. 30 VDC/500 mADC
<b>GENERAL</b>	
<b>User Interface</b>	
Display	Black/white OLED 256 x 64
Front panel indicators	4 x status LEDs (POWER, STANDBY, FAULT, OMNEO)
Front panel operating elements	3 buttons (UP, ENTER, DOWN)
Rear panel indicators	1 x status LED (STATUS)
Rear panel operating elements	Mains Switch
<b>Power Requirements</b>	100 V to 240 V, 50 Hz to 60 Hz AC
<b>Power Supply Topology</b>	Switching Mode Power Supply with digital controlled Power Factor Correction
<b>Protections</b>	Audio Limiters, High Temperature, DC, HF, Short Circuit, Back-EMF, Peak Current Limiters, Inrush Current Limiters, Turn-on Delay, Mains Circuit Breaker Protection, Mains Over-/Under voltage Protection
<b>Cooling</b>	Front-to-rear, temperature controlled fans, supervised
<b>Ambient Temperature Limits</b>	+5 °C to +40 °C (+40 °F to +105 °F)
<b>IEC Protection Class</b>	Class I (grounded)
<b>Electromagnetical Environment</b>	E1, E2, E3
<b>Color</b>	Black



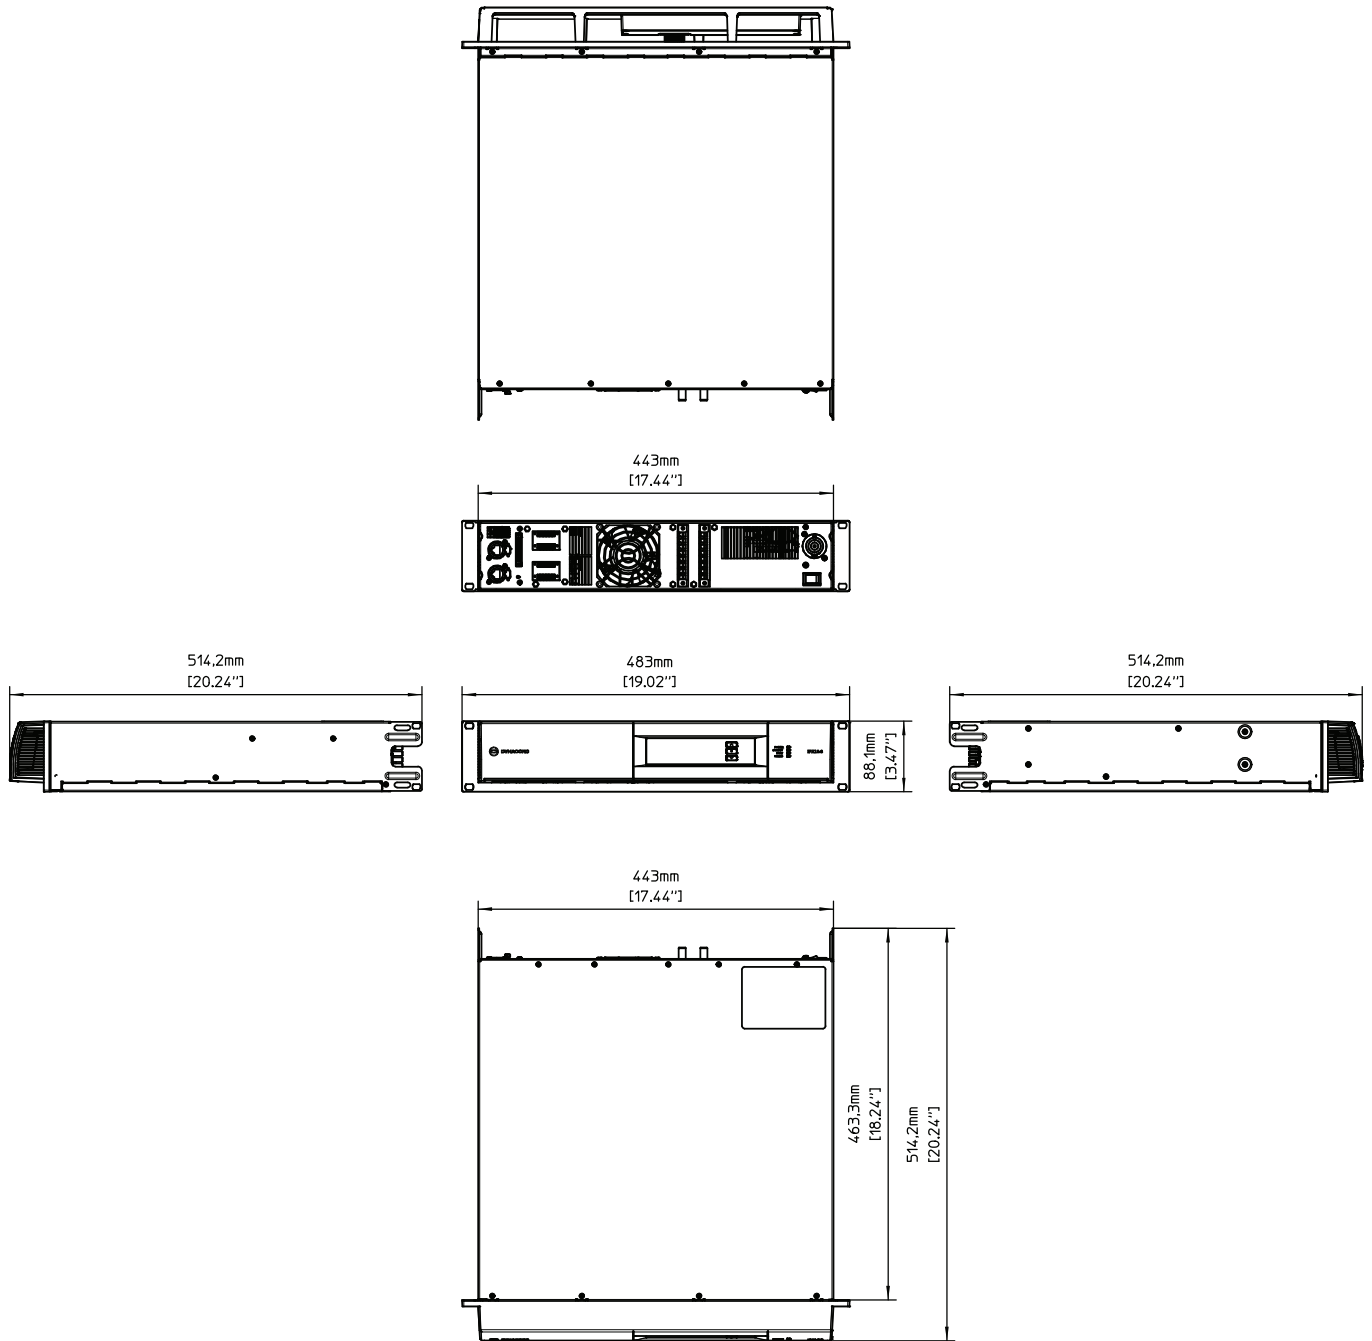

Dimensions: IPX

## Ordering information

### IPX10:8 DSP power amplifier 8x1250W, install

DSP power amplifier 8x1250W @ 4 ohms, OMNEO, 8 Dante-, 4 analog inputs, hi-z direct drive, GPIOs, euro-block connectors 100-240V, black  
Order number **IPX10:8**

---

#### Accessories

##### DC-RMK15 RMK-15

Rack Mount Kit for amplifiers, Length 15,5"; 1L/1R  
Order number **DC-RMK15**

---

**Germany:**

Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, NY 14450  
USA

[www.dynacord.com](http://www.dynacord.com)